




The Driller's Choice

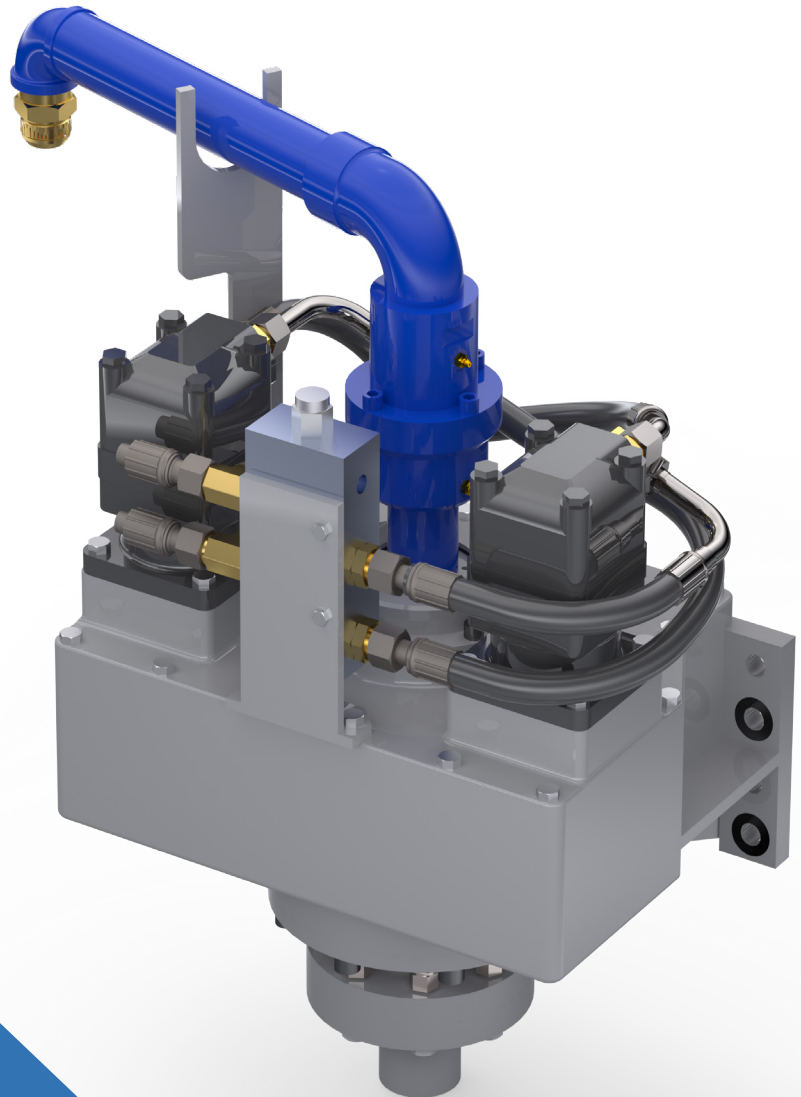

JT200-M SERIES HIGH SPEED DRILL HEAD

ROTARY DRILLING - MUD DRILLING - AUGERS - CORING - GEOTECHNICAL




mincon.com




JT200-M SERIES HIGH SPEED DRILL HEAD

The JT200-M Series Rotation Heads have 2 set speeds with variable speed control in between. The high torque/low speed and low torque/high speed settings allow the operator to alternate the drill head's power and speed for different applications and drill methods. A 2-3/8" center bore allows for mud or air flushing with the optional 2,500 PSI 90 degree swivel.

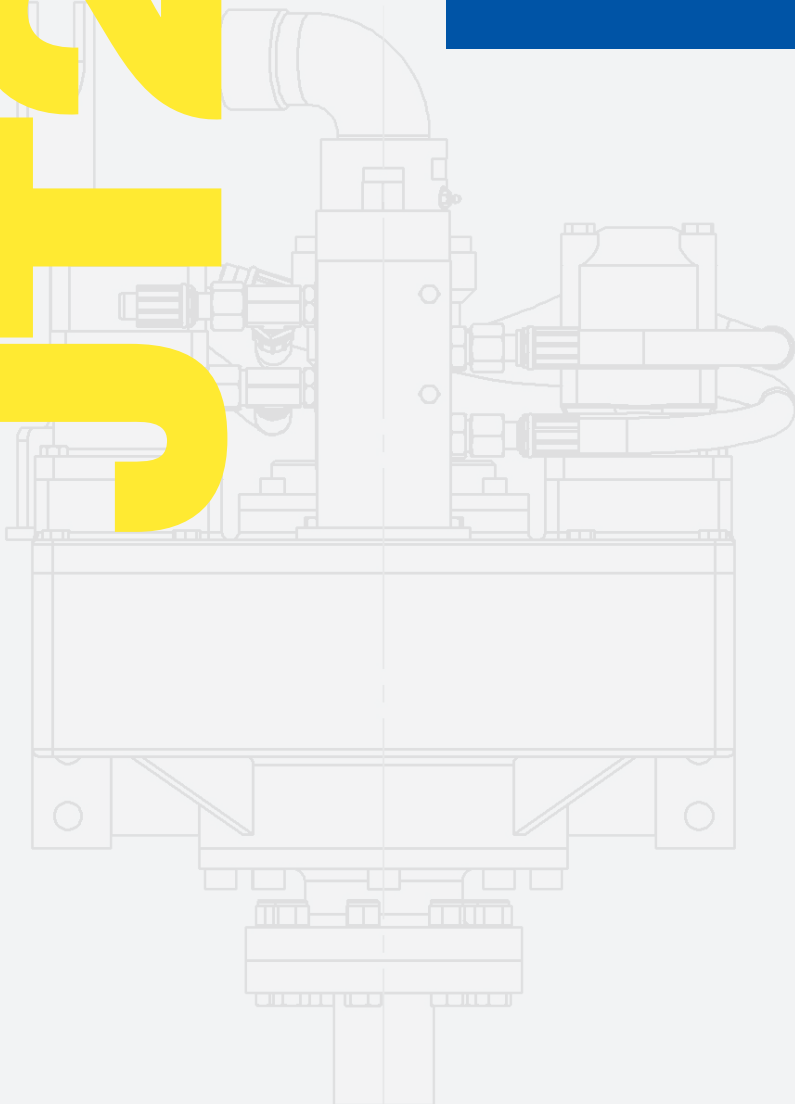

JT200-M DRILL HEAD

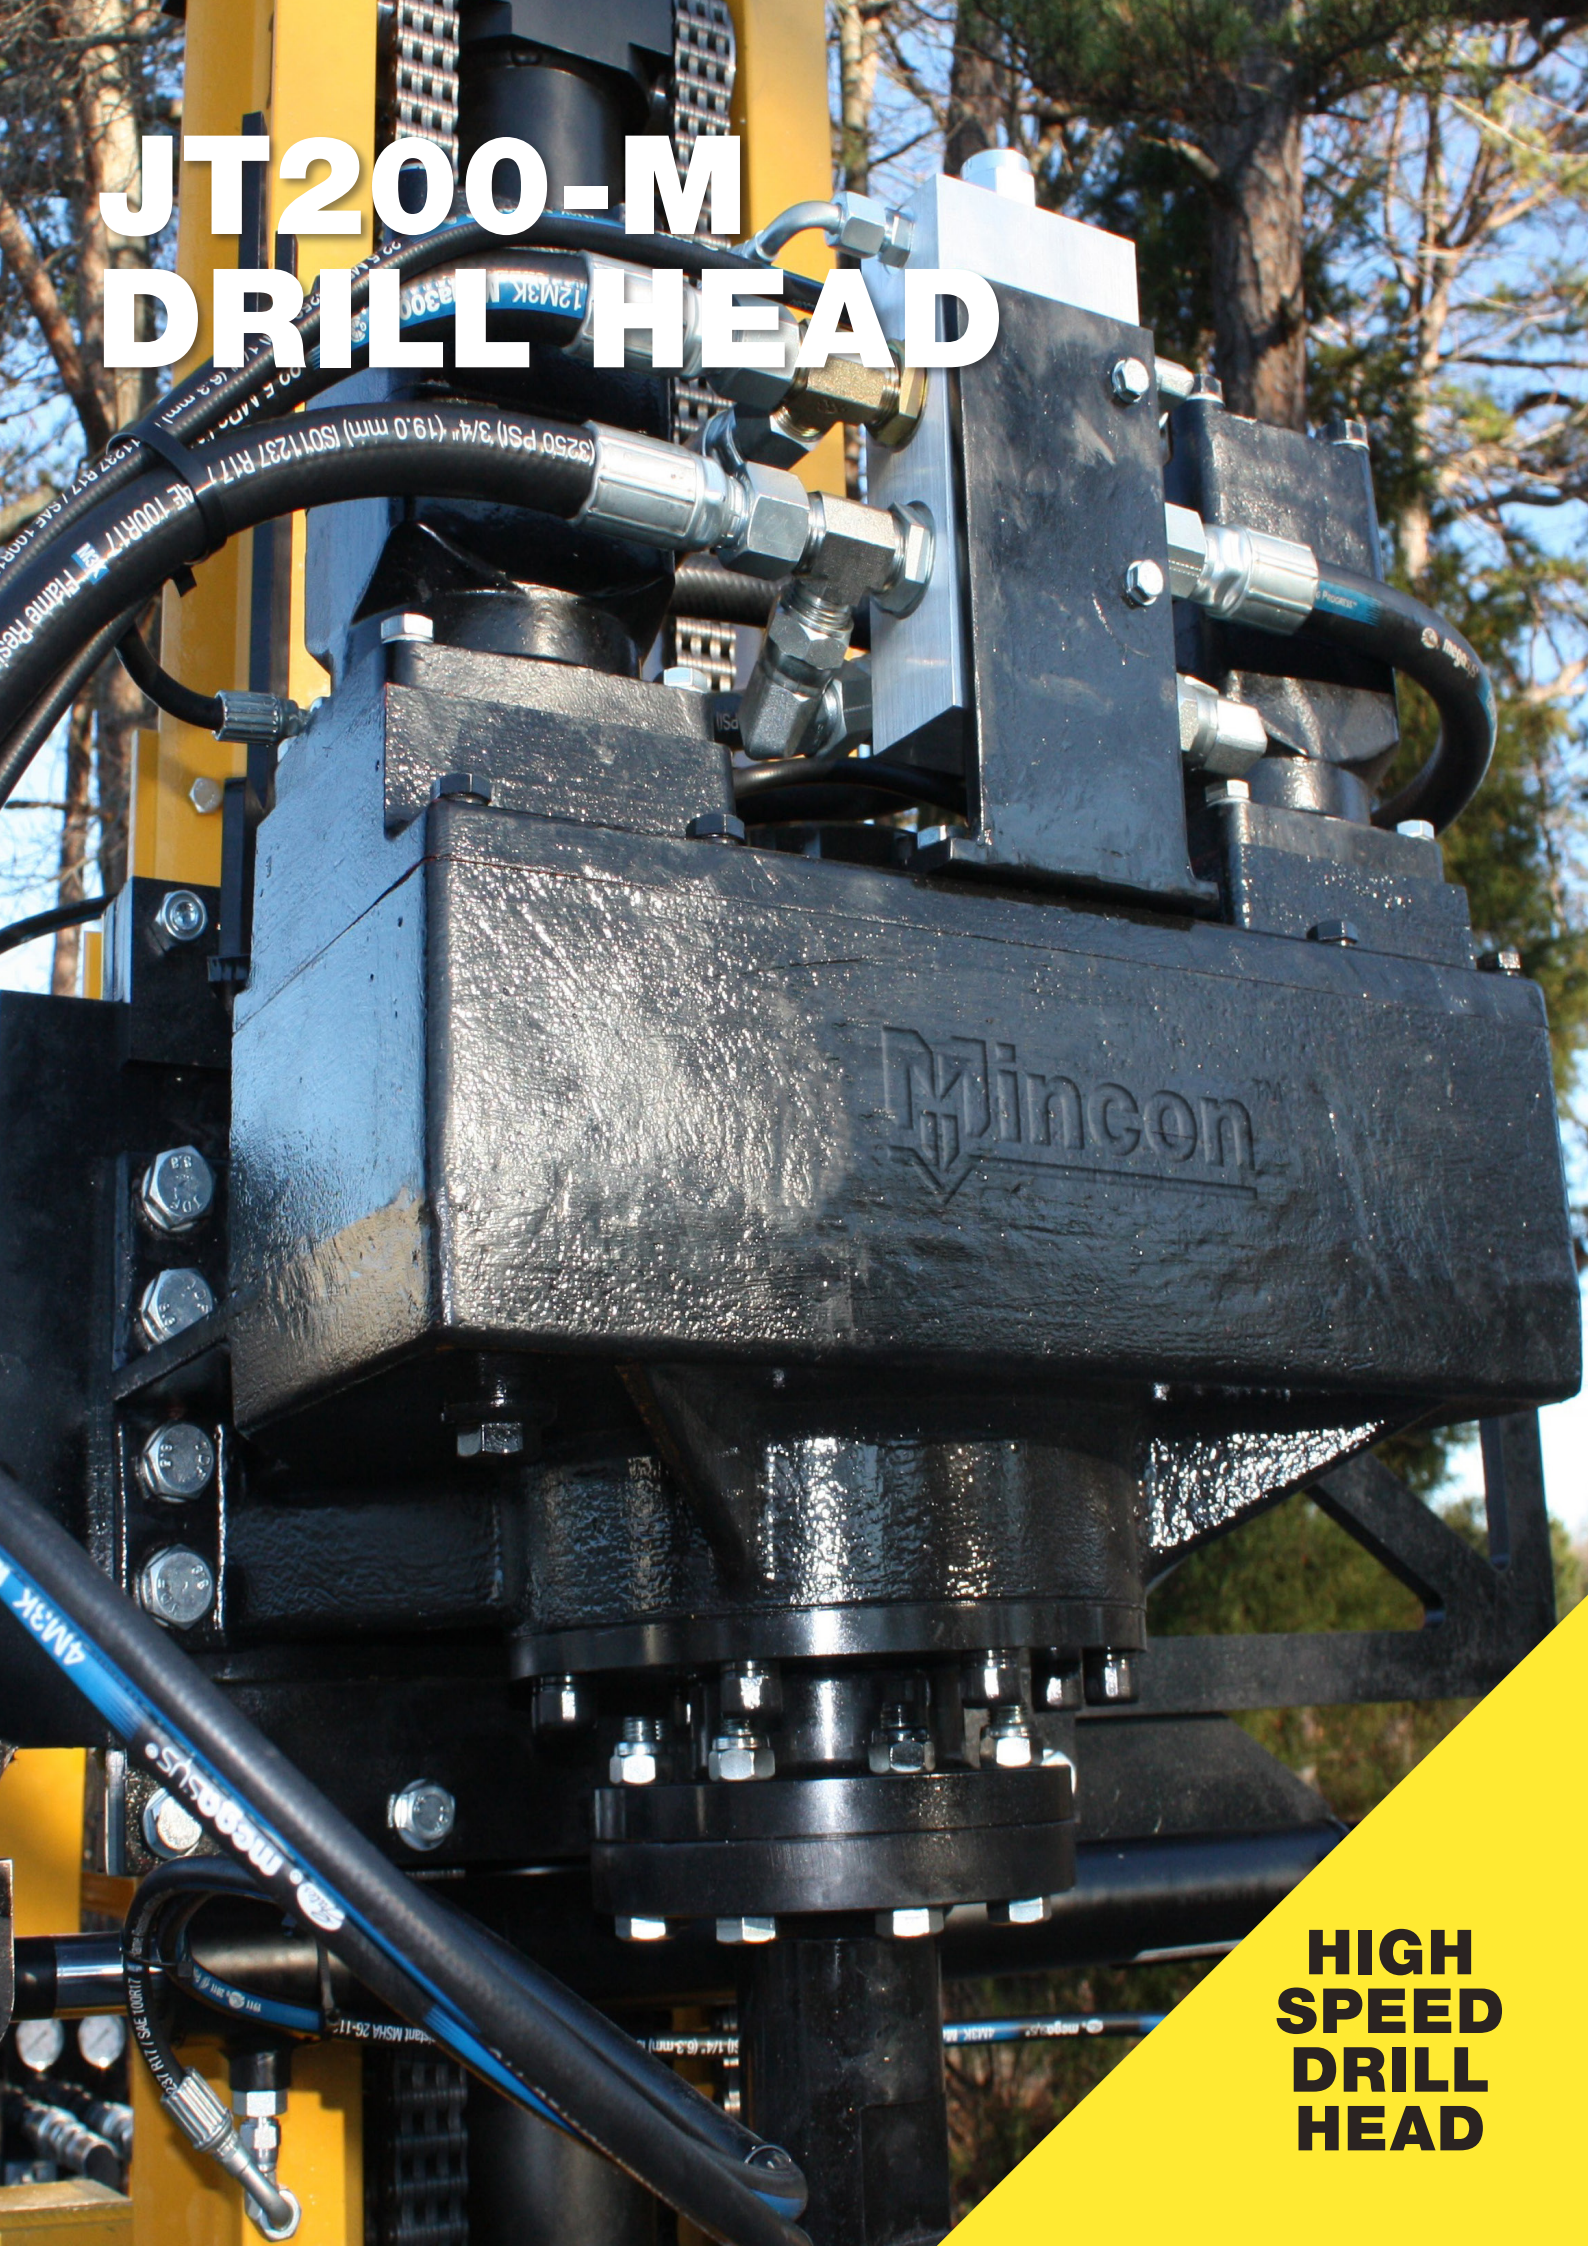

**HIGH
SPEED
DRILL
HEAD**

SPECIFICATIONS

JT221-M

	LOW SPEED		HIGH SPEED	
	IMPERIAL	METRIC	IMPERIAL	METRIC
MAX TORQUE	2,950 ft-lbs	4,000 Nm	1,475 ft-lbs	2000 Nm
MAX SPEED	102 rpm		204 rpm	
THROUGH BORE	2-3/8"	60 mm	2-3/8"	60 mm
SPEEDS	Variable		Variable	

JT222-M

	LOW SPEED		HIGH SPEED	
	IMPERIAL	METRIC	IMPERIAL	METRIC
MAX TORQUE	3,700 ft-lbs	5,030 Nm	1,850 ft-lbs	2,510 Nm
MAX SPEED	102 rpm		204 rpm	
THROUGH BORE	2-3/8"	60 mm	2-3/8"	60 mm
SPEEDS	Variable		Variable	

JT223-M

	LOW SPEED		HIGH SPEED	
	IMPERIAL	METRIC	IMPERIAL	METRIC
MAX TORQUE	4,580 ft-lbs	6,220 Nm	2,290 ft-lbs	3,110 Nm
MAX SPEED	82 rpm		165 rpm	
THROUGH BORE	2-3/8"	60 mm	2-3/8"	60 mm
SPEEDS	Variable		Variable	



JT224-M

	LOW SPEED		HIGH SPEED	
	IMPERIAL	METRIC	IMPERIAL	METRIC
MAX TORQUE	5,960 ft-lbs	8,080 Nm	2,980 ft-lbs	4,040 Nm
MAX SPEED	63 rpm		126 rpm	
THROUGH BORE	2-3/8"	60 mm	2-3/8"	60 mm
SPEEDS	Variable		Variable	

JT225-M

	LOW SPEED		HIGH SPEED	
	IMPERIAL	METRIC	IMPERIAL	METRIC
MAX TORQUE	6,400 ft-lbs	8,700 Nm	3,200 ft-lbs	4,350 Nm
MAX SPEED	50 rpm		100 rpm	
THROUGH BORE	2-3/8"	60 mm	2-3/8"	60 mm
SPEEDS	Variable		Variable	

TECHNICAL DRAWING

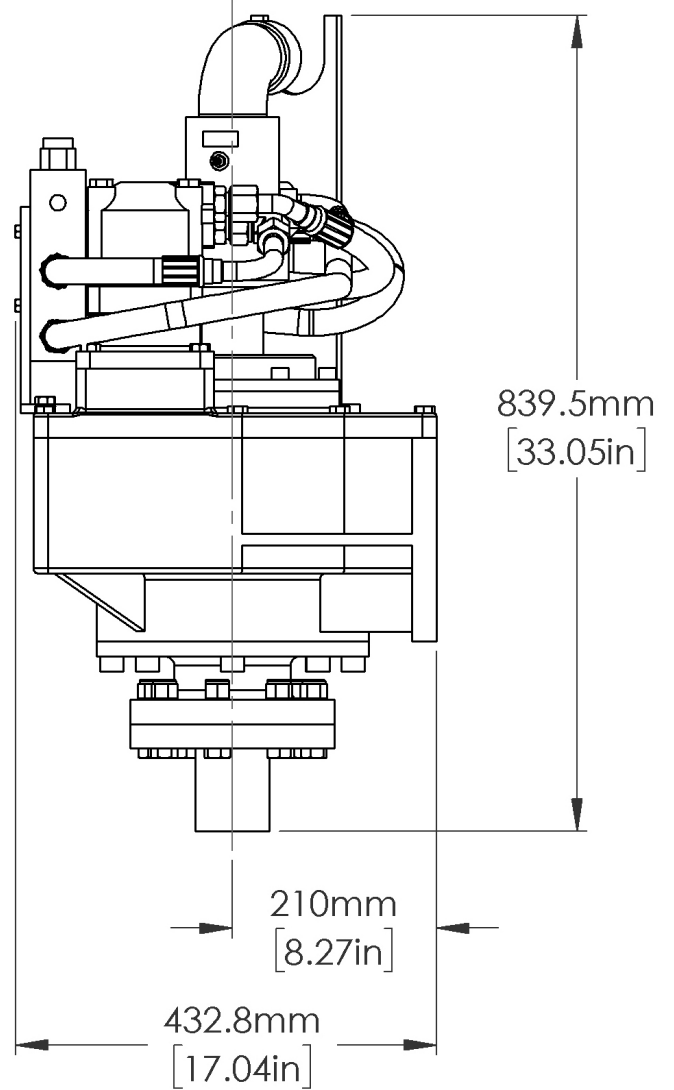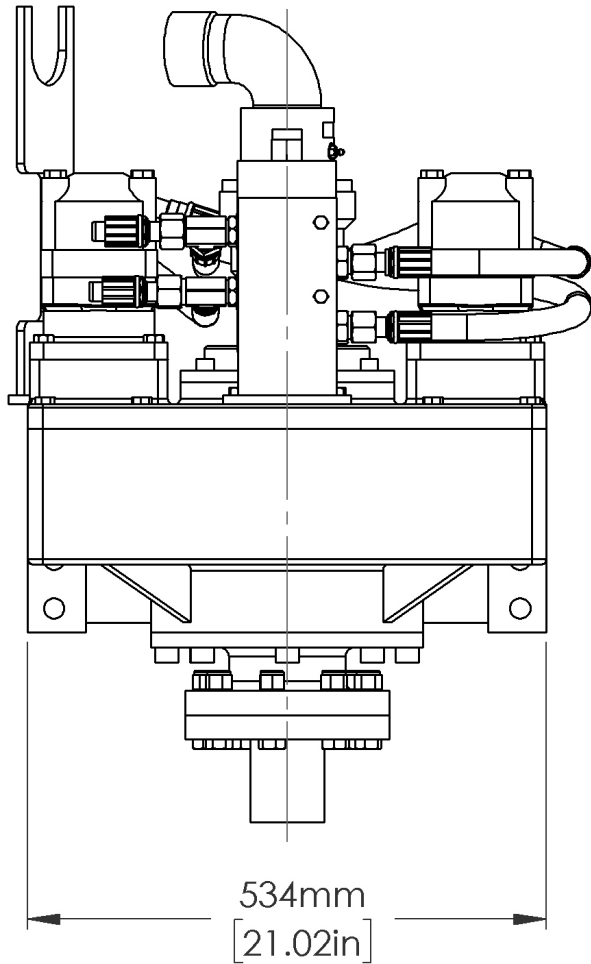

JT200-M



The Driller's Choice

MINCON INC
603 Centre Ave NW, Roanoke,
VA 24016, USA
T. +1 540-344-9939
E. salesusa@mincon.com
W. mincon.com

AMERICAS REGION · EUROPE AND MIDDLE EAST REGION · AFRICA REGION · ASIA PACIFIC REGION