




Item #	Part Number	Description
<b>MD901AS06 MP90-HD (4 1/2" A.P.I. Reg. Pin)</b>		
1	MD901BH03	Backhead (4 1/2" A.P.I. Reg. Pin)
2	MD922OR01	O Ring
3	MB506CH01	Choke Blank
4	MD802CV01	Check Valve
5	MB503SP01	Spring
6	MD905LR01	Lock Ring
7	MD904SM01	Steel Make-Up Ring
8	MD907DR01	Air Distributor
9	MD921OR01	O Ring
10	MD820OR01	O Ring
11	MD909SR01	Seating Ring
12	MD908IC01	Inner Cylinder
13	MD910PN01	Piston
14	MD911WS02	Wear Sleeve
15	MD912PR01	Piston Retaining Ring
16	MD913BB01	Aligner
17	MD922OR01	O Ring
18	MD914BR01	Bit Retaining Ring
19	MD821OR01	O Ring
20	MD915CK02	Chuck (TD90) HD
<b>MD926SK01 Service Kit</b>		
3	MB506CH01	Choke Blank
	MB506CH02	Choke 1/8" (3.2mm)
	MB506CH03	Choke 3/16" (4.8mm)
5	MB503SP01	Spring
	MD925OK01	O Ring Kit
<b>MD925OK01 O Ring Kit</b>		
	O Rings	O Rings at positions #2, #9, #10, #17, #19

Specifications	Metric	Imperial
Hammer Outside Diameter	219 mm	8.6"
Shoulder to Shoulder	1,355 mm	53.3"
Backhead Spanner Flat Size	177.5 mm	7"
Drill Bit Shank Type	TD90	
Minimum Bit Size	254 mm	10"
Hammer Weight (Less Bit)	315 kg	694.5 lbs
Drill Bit Weight	71.7 kg	158.1 lbs
Piston Weight	59.4 kg	131 lbs
Backhead Stand Off	1.5 mm	0.06"
Make up Torque	9,485-12,195 Nm	7,000-9,000 ft.lbf
Wear Sleeve Reverse Limit	Non-Reversible	
Wear Sleeve Discard Limit	181 mm	7.13"

Stated drill bit weight is indicative only. Actual drill bit weight will vary based on drill bit head size and carbide configuration.

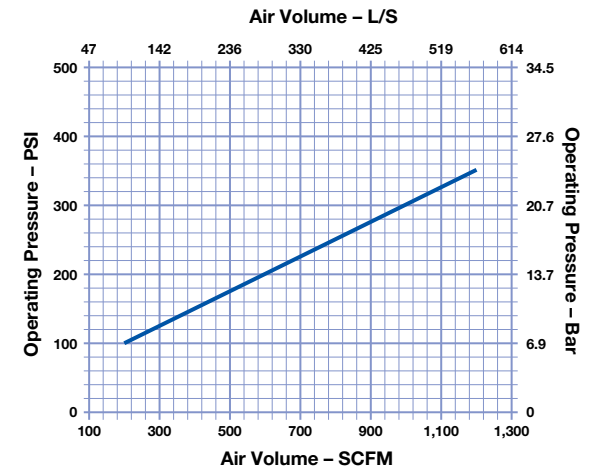

**Disclaimer:**  
 1. Air consumption values are based on a combination of simulation data and real-world testing.  
 2. All air charts are based on normal temperature and atmospheric pressure: 20°C and 101.325 kPa (68°F and 14.696 psi).  
 3. Air density decreases with altitude, which will increase air consumption. Please consult the Mincon technical implementation team for exact air package requirements that take account for altitude and ground conditions.