




The Driller's Choice

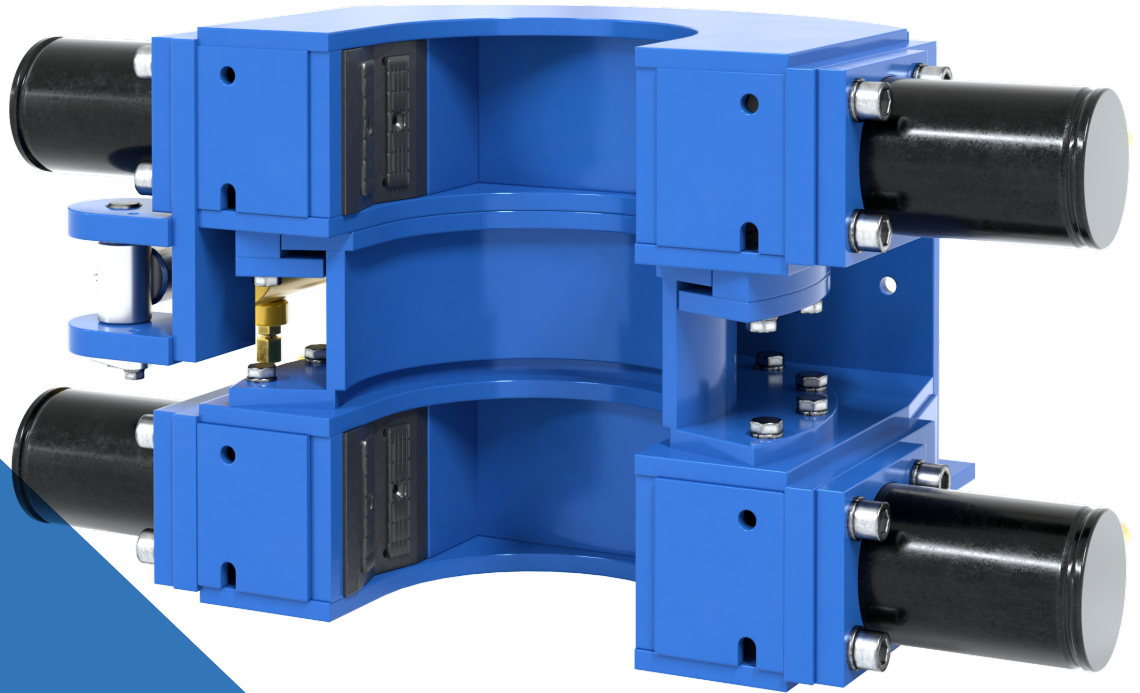

DOUBLE BREAKOUT CLAMPS

ADVANCED CLAMPING SYSTEMS



mincon.com



DOUBLE BREAKOUT CLAMPS

A max 8.8" ID for casings and min 2.5" ID for drill rods. The Double Breakout Clamps come with a top hydraulic breakout cylinder set of jaws and a bottom set of fixed grip jaws. The grip jaws have hardened steel grip 'teeth' to securely hold casings and rods. Capable of gripping and breaking out even the toughest casings.



SPECIFICATIONS

Clamp Specifications

	IMPERIAL	METRIC
WEIGHT	309 lbs	140 kg
MAX ID (TOP & BOTTOM)	8.8"	223 mm
MIN ID (TOP & BOTTOM)	1.56"	40 mm
GRIPPING FORCE (TOP & BOTTOM)	50,000 lbs	22,700 kgf
BREAKOUT TORQUE (TOP)	20,340 ft.lbs	27,570 Nm

Operating Specifications

	IMPERIAL	METRIC
PRESSURE	2,900 psi	200 bar
FLOW	3.5 gpm	13 l/min
MOUNT TYPE	8-Bolt Back/Bottom Plate	
CYLINDERS INCLUDED	5 – Top & Bottom Clamps + Breakout.	

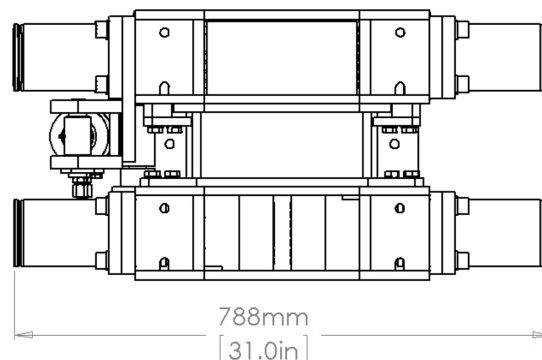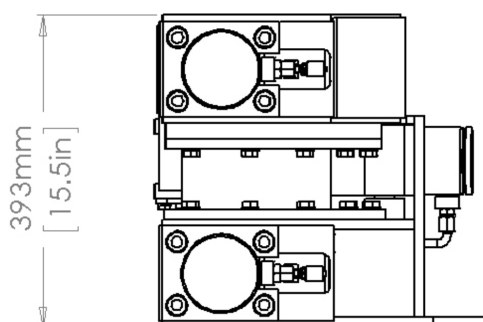



The Driller's Choice

MINCON INC
603 Centre Ave NW, Roanoke,
VA 24016, United States
T. +1 540-344-9939
E. salesusa@mincon.com
W. mincon.com

AMERICAS REGION · EUROPE AND MIDDLE EAST REGION · AFRICA REGION · ASIA PACIFIC REGION