



mincon.com



2026  
**DTH  
HAMMERS  
& BITS**

The Driller's Choice



# CONTENTS

<b>Mincon Company Information</b>	<b>4</b>
<b>DTH Hammers and Bits For All Applications</b>	<b>6</b>
<b>DTH Hammers</b>	<b>7</b>
3-inch hammers	7
4-inch hammers	8
5-inch hammers	9
6- to 7-inch hammers	10
8- to 9-inch hammers	11
10- to 15-inch hammers	12
18- to 24-inch hammers	13
34- to 40-inch hammers	14
<b>DTH Drill Bits</b>	<b>15</b>
<b>Bit Face Designs</b>	<b>16</b>
<b>Carbide Inserts</b>	<b>17</b>
<b>Drill Bit Shanks</b>	<b>18</b>
3- to 5-inch shanks	19
5- to 7-inch shanks	20
8- to 12-inch shanks	21
12- to 34-inch shanks	22
<b>The Complete Package</b>	<b>23</b>



# MINCON, EST. 1977

Mincon has earned its reputation as The Driller's Choice thanks to nearly five decades of developing world-class rock drilling solutions for a wide range of applications.



## EXPERTS ON SITE

Rock-drilling expertise doesn't stop at manufacturing. Customers also benefit from Mincon's highly-qualified global teams who work closely with drillers for tailoring drilling packages to their equipment and ground conditions, while also accounting for application-specific requirements. Feedback from your drill site is provided to our design engineers, informing the cycle of continuous improvement.




## SOLUTIONS FOR EVERY APPLICATION

Around the world, customers like you trust Mincon tools for blasthole, exploration, geotechnical, water-well and geothermal applications. Whatever the ground conditions or project scope, Mincon's experienced technical and integration teams work to understand your challenges and provide practical, end-to-end solutions that help you achieve dependable, measurable results.



## ENGINEERED EFFICIENCY

You want to be more efficient – to drill faster while using less fuel, and maintaining productivity throughout the useful life of your drilling consumables. Mincon helps you achieve this with proven designs, precision-made in our state-of-the-art factories and strengthened using proprietary heat-treat processes. These engineering efforts deliver components that have tight tolerances, smooth running surfaces surface, and enhanced material properties that ensure longer life on your drill site.



## EUROPE AND MIDDLE EAST REGION

All European Countries  
Middle East Countries

## AMERICAS REGION

North and South America

## ASIA PACIFIC

Australia, New Zealand,  
Pacific Islands

## AFRICA REGION

African Continent

# POINTS OF PRESENCE

With eight global factories, a growing network of Mincon customer service centres, and more than 200 distributors, we have the international presence that our customers need. We manufacture within region to meet local customer demand, while providing service and support to ensure customers achieve optimum productivity from their assets.

# COMPREHENSIVE PRODUCT RANGE

Our ambition is always to offer customers a comprehensive range of drilling tools that will drill faster and last longer. Individually, Mincon products offer incremental savings. Together, a complete Mincon drill string will deliver tangible savings through higher penetration rates, unparalleled durability, rock-solid reliability, and reduced strain on ancillary components.



# DTH HAMMERS AND BITS FOR ALL APPLICATIONS

Mincon DTH hammers deliver a balanced combination of performance, efficiency, and reliability. Ranging from 3"– 40", our DTH hammers have a proven penetration rate that delivers more meters per hour for a lower total drilling cost in quarrying, exploration, water well, geothermal, and construction/geotechnical projects.

Our next-generation range of DTH hammers incorporates improvements based on customer feedback and real-world drilling in a wide variety of rock formations. Working closely with customers, our engineers have evolved the designs and materials for each of our DTH hammers, enhancing them to deliver higher performance while using less fuel for each metre drilled.

All components are precision-manufactured using high-quality raw materials, and undergo proprietary heat treatment processes at our facilities to guarantee durability and quality.

When it comes to compatibility, the Mincon DTH hammer range supports a wide variety of popular drill bit shank designs – in addition to being available with all conventional back head connections. API Reg pin connectors are standard, with alternative connection methods available on request. Mincon also works with customers to tailor DTH hammers to specific applications, through the use of special-order options and features. Speak to your Mincon technical representative to learn more about the latest technologies that can benefit your drilling operations.

**“ ...delivers more meters per hour for a lower total drilling cost.**


This culture of continuous improvement ensures that we are always engineering for superior results in all ground conditions, with processes that include on-site performance audits and training.

Our pioneering DTH hammer designs also address issues of airflow to optimise cuttings evacuation, ease of drawback, disassembly, safety, and maintenance costs. Our next-generation DTH hammers, including the renowned MP Series, ensure class-leading penetration rates and lower total drilling costs.

Every Mincon DTH hammer is manufactured in our own factories, adhering to strict ISO and global standards.




# 3-INCH HAMMERS SPECIFICATIONS

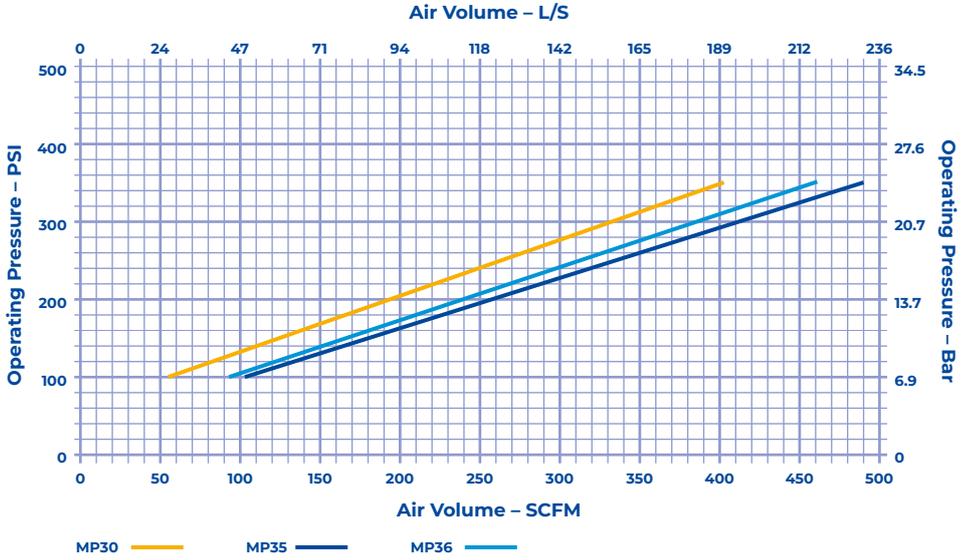

- Disclaimer:**
1. Air consumption values are based on a combination of simulation data and real-world testing.
  2. All air charts are based on normal temperature and atmospheric pressure: 20°C and 101.325 kPa (68°F and 14.696 psi).
  3. Air density decreases with altitude, which will increase air consumption. Please consult the Mincon technical implementation team for exact air package requirements that take account for altitude and ground conditions.

Hammer name	Shank support	Foot valve	Standard backhead thread / type	Hammer OD	Hammer length (shoulder to shoulder)	Minimum bit size	Maximum bit size	Hammer weight	Piston weight
MP30-DH	DHD3.5	Yes	2 3/8" API	77 mm (3")	858 mm (33.8")	85 mm (3.4")	105 mm (4.1")	21.4 kg (47.2 lbs)	4.1 kg (9 lbs)
MP35-DH	DHD3.5	Yes	2 3/8" API	85 mm (3.3")	805 mm (31.7")	95 mm (3.7")	105 mm (4.1")	24.5 kg (54 lbs)	3.9 kg (8.6 lbs)
MP35-MD	MD3.5	Yes	2 3/8" API	85 mm (3.3")	805 mm (31.7")	95 mm (3.7")	105 mm (4.1")	24.5 kg (54 lbs)	3.9 kg (8.6 lbs)
MP36-MD	MD3.5	Yes	2 3/8" API	85 mm (3.3")	805 mm (31.7")	95 mm (3.7")	105 mm (4.1")	25 kg (55.1 lbs)	4.6 kg (10.1 lbs)

# 4-INCH HAMMERS SPECIFICATIONS

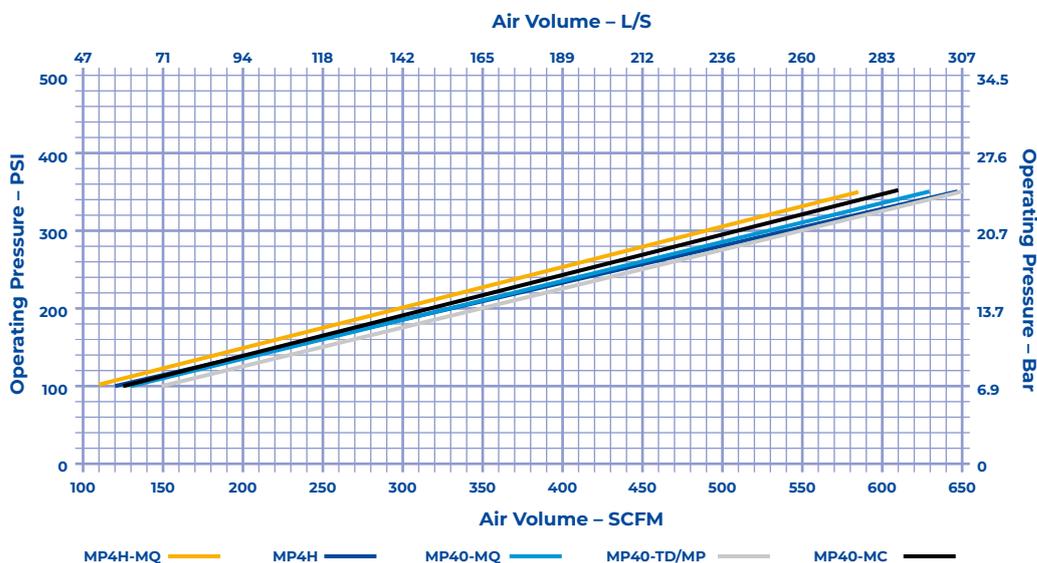


**Disclaimer:**

1. Air consumption values are based on a combination of simulation data and real-world testing.
2. All air charts are based on normal temperature and atmospheric pressure: 20°C and 101.325 kPa (68°F and 14.696 psi).
3. Air density decreases with altitude, which will increase air consumption. Please consult the Mincon technical implementation team for exact air package requirements that take account for altitude and ground conditions.

Hammer name	Shank support	Foot valve	Standard backhead thread / type	Hammer OD	Hammer length (shoulder to shoulder)	Minimum bit size	Maximum bit size	Hammer weight	Piston weight
MP4H-TD	TD40	Yes	2 3/8" API	98 mm (3.9")	955 mm (37.6")	110 mm (4.3")	130 mm (5.1")	38.5 kg (84.9 lbs)	7.3 kg (16.1 lbs)
MP4H-DH	DHD340	Yes	2 3/8" API	98 mm (3.9")	955 mm (37.6")	110 mm (4.3")	130 mm (5.1")	38.5 kg (84.9 lbs)	7.3 kg (16.1 lbs)
MP4H-MD	MD4	Yes	2 3/8" API	98 mm (3.9")	955 mm (37.6")	110 mm (4.3")	130 mm (5.1")	38.5 kg (84.9 lbs)	7.3 kg (16.1 lbs)
MP4H-MQ	MQ40	No	2 3/8" API	98 mm (3.9")	1,021 mm (40.2")	110 mm (4.3")	130 mm (5.1")	40.1 kg (88.4 lbs)	7.9 kg (17.4 lbs)
MP4H-HD	TD40	Yes	2 3/8" API	101.5 mm (4")	955.3 mm (37.6")	110 mm (4.3")	130 mm (5.1")	42.6 kg (93.9 lbs)	7.3 kg (16.1 lbs)
MP40-TD	TD40	Yes	2 3/8" API	101.5 mm (4")	981 mm (38.6")	110 mm (4.3")	130 mm (5.1")	41 kg (90.4 lbs)	8.3 kg (18.3 lbs)
MP40-MP	MP40	Yes	2 3/8" API	101.5 mm (4")	981 mm (38.6")	110 mm (4.3")	130 mm (5.1")	41 kg (90.4 lbs)	8.3 kg (18.3 lbs)
MP40-MQ	MQ40	No	2 3/8" API	101.5 mm (4")	981 mm (38.6")	110 mm (4.3")	130 mm (5.1")	43.5 kg (96 lbs)	8.3 kg (18.3 lbs)
MP40-MC	MC43	No	2 3/8" API	101.5 mm (4")	983 mm (38.7")	110 mm (4.3")	130 mm (5.1")	46.0 kg (101.4 lbs)	9.6 kg (22.5 lbs)


# 5-INCH HAMMERS SPECIFICATIONS

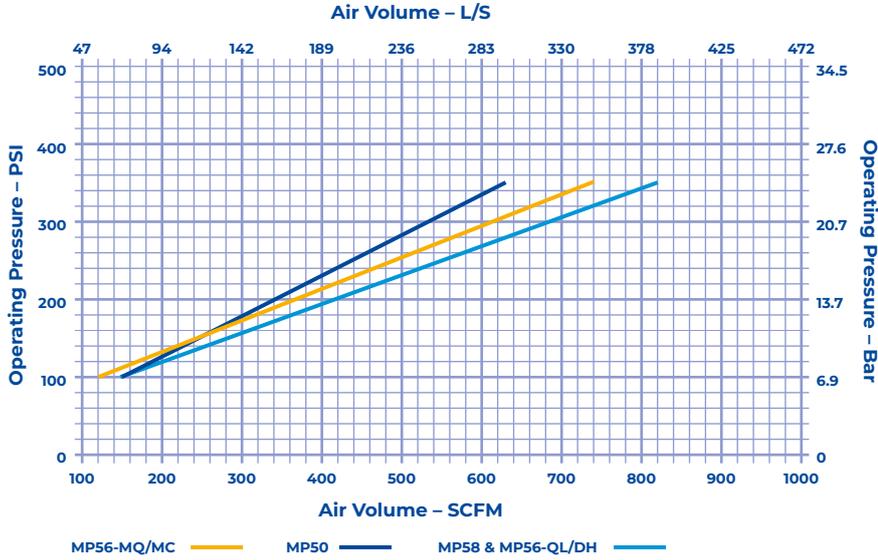

**Disclaimer:**  
 1. Air consumption values are based on a combination of simulation data and real-world testing.  
 2. All air charts are based on normal temperature and atmospheric pressure: 20°C and 101.325 kPa (68°F and 14.696 psi).  
 3. Air density decreases with altitude, which will increase air consumption. Please consult the Mincon technical implementation team for exact air package requirements that take account for altitude and ground conditions.

Hammer name	Shank support	Foot valve	Standard backhead thread / type	Hammer OD	Hammer-length (shoulder to shoulder)	Minimum bit size	Maximum bit size	Hammer weight	Piston weight
MP50-QL	QL50	Yes	3 1/2" API	115 mm (4.5")	994 mm (39.1")	127 mm (5")	152 mm (6")	55.4 kg (122.1 lbs)	12.5 kg (27.6 lbs)
MP50-DH	DHD350	Yes	3 1/2" API	115 mm (4.5")	1,057 mm (41.6")	127 mm (5")	152 mm (6")	56 kg (123.5 lbs)	12.6 kg (27.8 lbs)
MP50-MQ	MQ50	No	3 1/2" API	115 mm (4.5")	1,057 mm (41.6")	127 mm (5")	152 mm (6")	59.9 kg (132 lbs)	13.7 kg (30.1lbs)
MP56-QL	QL50	Yes	3 1/2" API	124 mm (4.9")	1,019 mm (40.1")	140 mm (5.6")	152 mm (6")	67 kg (147.7 lbs)	15.3 kg (33.7 lbs)
MP56-MQ	MQ50	No	3 1/2" API	124 mm (4.9")	1,019 mm (40.1")	140 mm (5.6")	152 mm (6")	69 kg (152.1 lbs)	14.9 kg (32.9 lbs)
MP56-DH	DHD350	Yes	3 1/2" API	124 mm (4.9")	1,039 mm (40.9")	140 mm (5.6")	152 mm (6")	67 kg (147.7 lbs)	15.3 kg (33.7 lbs)
MP56-MC	MC51	No	3 1/2" API	124 mm (4.9")	957.5 mm (37.7")	140 mm (5.6")	152 mm (6")	66.3 kg (146.2 lbs)	14.9 kg (32.9 lbs)
MP58-MC	MC51	No	3 1/2" API	130 mm (5.1")	958 mm (37.7")	140 mm (5.6")	152 mm (6")	74.4 kg (164 lbs)	17 kg (37.5 lbs)

# 6-7-INCH HAMMERS SPECIFICATIONS

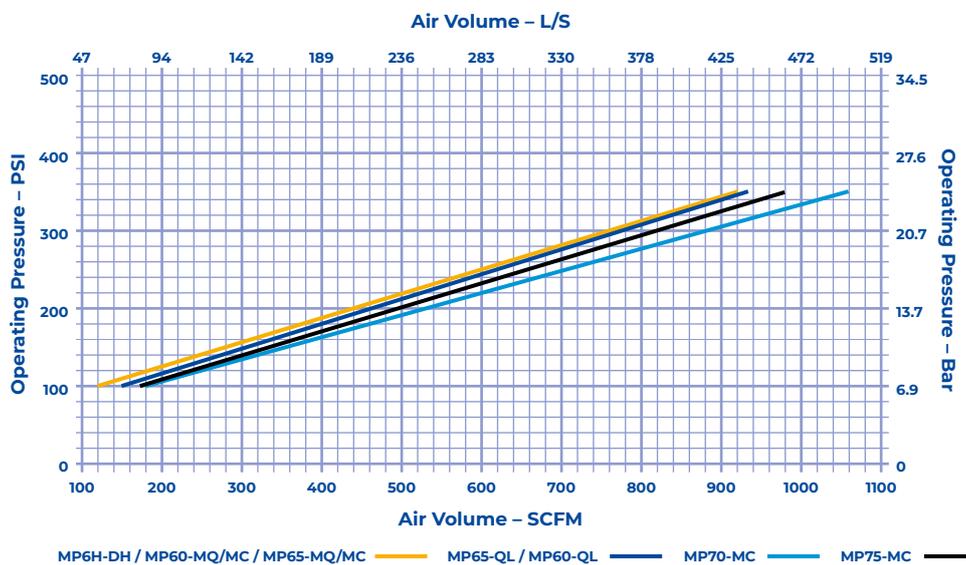


**Disclaimer:**

1. Air consumption values are based on a combination of simulation data and real-world testing.
2. All air charts are based on normal temperature and atmospheric pressure: 20°C and 101.325 kPa (68°F and 14.696 psi).
3. Air density decreases with altitude, which will increase air consumption. Please consult the Mincon technical implementation team for exact air package requirements that take account for altitude and ground conditions.

Hammer name	Shank support	Foot valve	Standard backhead thread / type	Hammer OD	Hammer length (shoulder to shoulder)	Minimum bit size	Maximum bit size	Hammer weight	Piston weight
MP6H-DH	DHD360	Yes	3 1/2" API	140 mm (5.5")	1,134 mm (44.6")	152 mm (6")	203 mm (8")	95.2 kg (210 lbs)	20.3 kg (44.8 lbs)
MP60-QL	QL60	Yes	3 1/2" API	141 mm (5.6")	1,002 mm (39.4")	152 mm (6")	203 mm (8")	83.7 kg (184.5 lbs)	21.6 kg (47.6 lbs)
MP60-MQ	MQ60	No	3 1/2" API	141 mm (5.6")	1,002 mm (39.4")	152 mm (6")	203 mm (8")	85 kg (187.4 lbs)	19.3 kg (42.5 lbs)
MP60-MC	MC61	No	3 1/2" API	141 mm (5.6")	1,002 mm (39.4")	152 mm (6")	203 mm (8")	89 kg (196 lbs)	23 kg (50.7 lbs)
MP65-QL	QL60	Yes	3 1/2" API	146 mm (5.8")	1,002 mm (39.4")	159 mm (6.3")	203 mm (8")	93 kg (205 lbs)	21.6 kg (47.6 lbs)
MP65-MQ	MQ60	No	3 1/2" API	146 mm (5.8")	1,002 mm (39.4")	159 mm (6.3")	203 mm (8")	93 kg (205 lbs)	19.3 kg (42.5 lbs)
MP65-MC	MC61	No	3 1/2" API	146 mm (5.8")	1,002 mm (39.4")	159 mm (6.3")	203 mm (8")	96.4 kg (212.5 lbs)	23 kg (50.7 lbs)
MP70-MC	MC71	No	4 1/2" API	160 mm (6.3")	1,114 mm (43.9")	191 mm (7.5")	229 mm (9")	128.0 kg (282.0 lbs)	30.3 kg (66.8 lbs)
MP75-MC	MC71	No	4 1/2" API	173 mm (6.8")	1,182 mm (46.5")	191 mm (7.5")	229 mm (9")	169.6 kg (373.9 lbs)	37.6 kg (82.9 lbs)

# 8-9-INCH HAMMERS SPECIFICATIONS

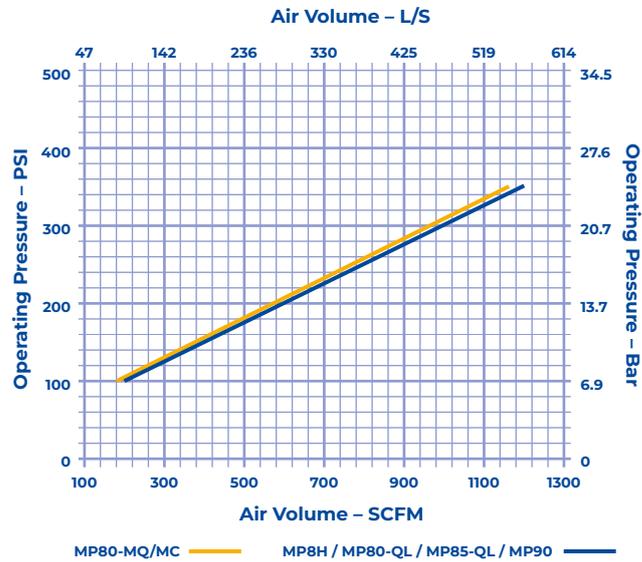


**Disclaimer:**

1. Air consumption values are based on a combination of simulation data and real-world testing.
2. All air charts are based on normal temperature and atmospheric pressure: 20°C and 101.325 kPa (68°F and 14.696 psi).
3. Air density decreases with altitude, which will increase air consumption. Please consult the Mincon technical implementation team for exact air package requirements that take account for altitude and ground conditions.

Hammer name	Shank support	Foot valve	Standard backhead thread / type	Hammer OD	Hammer length (shoulder to shoulder)	Minimum bit size	Maximum bit size	Hammer weight	Piston weight
MP8H-DH	DHD380	Yes	4 1/2" API	181.5 mm (7.2")	1,205 mm (47.5")	203 mm (8")	254 mm (10")	176 kg (388 lbs)	39 kg (86 lbs)
MP80-QL	QL80	Yes	4 1/2" API	181.5 mm (7.2")	1,186 mm (46.7")	203 mm (8")	254 mm (10")	172.1 kg (379.4 lbs)	38.9 kg (85.8 lbs)
MP80-MC	MC81	No	4 1/2" API	181.5 mm (7.2")	1,196 mm (47.1")	203 mm (8")	254 mm (10")	184 kg (405.7 lbs)	46.3 kg (102.1 lbs)
MP80-MQ	MQ80	No	4 1/2" API	181.5 mm (7.2")	1,306 mm (51.4")	203 mm (8")	254 mm (10")	193 kg (425.5 lbs)	46.3 kg (102.1 lbs)
MP85-QL	QL80	Yes	4 1/2" API	193.7mm (7.6")	1,230 mm (48.4")	216 mm (8.5")	254 mm (10")	213.5 kg (470.7 lb)	38.9 kg (85.8 lb)
MP90-TD	TD90	Yes	4 1/2" API	195 mm (7.7")	1,355 mm (53.3")	229 mm (9")	254 mm (10")	234 kg (515.9 lbs)	59.4 kg (131 lbs)
MP90-HD	TD90	Yes	4 1/2" API	219 mm (8.6")	1,355 mm (53.3")	254 mm (10")	254 mm (10")	315 kg (694.5 lbs)	59.4 kg (131 lbs)

# 10-15-INCH HAMMERS SPECIFICATIONS

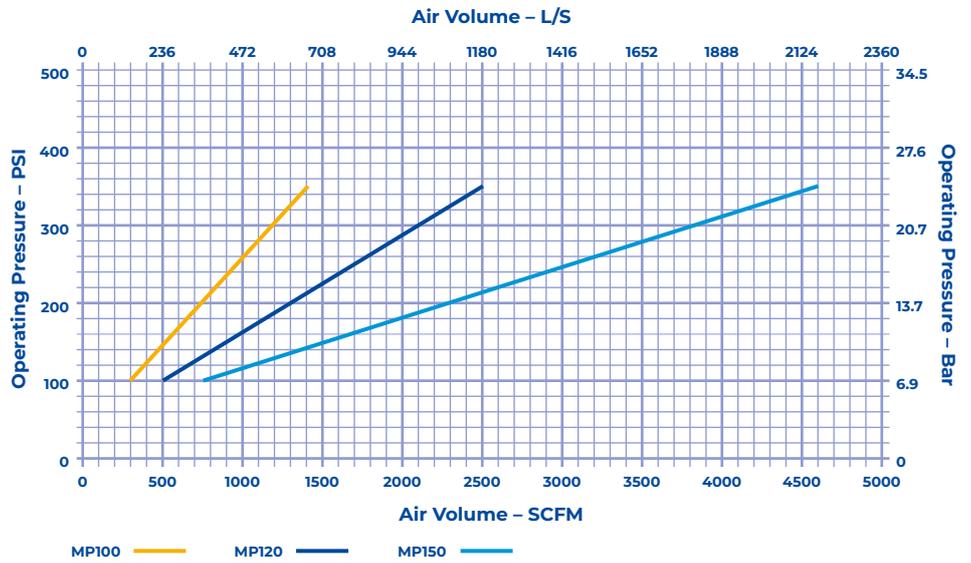

**Disclaimer:**

1. Air consumption values are based on a combination of simulation data and real-world testing.
2. All air charts are based on normal temperature and atmospheric pressure: 20°C and 101.325 kPa (68°F and 14.696 psi).
3. Air density decreases with altitude, which will increase air consumption. Please consult the Mincon technical implementation team for exact air package requirements that take account for altitude and ground conditions.

Hammer name	Shank support	Foot valve	Standard backhead thread / type	Hammer OD	Hammer length (shoulder to shoulder)	Minimum bit size	Maximum bit size	Hammer weight	Piston weight
MP100-SD	SD10	Yes	6 5/8" API	219 mm (8.6")	1,360 mm (53.5")	254 mm (10")	305 mm (12")	295 kg (650.4 lbs)	77.8 kg (171.5 lbs)
MP100-MC	MC100	No	6 5/8" API	219 mm (8.6")	1,379.6 mm (54.3")	254 mm (10")	305 mm (12")	309 kg (681.2 lbs)	79.3 kg (174.8 lbs)
MP120-QL	QL120	Yes	6 5/8" API	273 mm (10.8")	1,454 mm (57.2")	305 mm (12")	381 mm (15")	457 kg (1,007.5 lbs)	138.5 kg (305.3 lbs)
MP120-SD	SD12	Yes	6 5/8" API	273 mm (10.8")	1,431 mm (56.3")	305 mm (12")	381 mm (15")	460 kg (1,014.1 lbs)	130.8 kg (288.4 lbs)
MP120-MC	MC120	No	6 5/8" API	273 mm (10.8")	1,454mm (57.2")	305 mm (12")	381 mm (15")	468 kg (1031.8 lbs)	151.8 kg 334.7 lbs
MP120-N125	N125	Yes	6 5/8" API	273 mm (10.8")	1,451 mm (57.1")	305 mm (12")	381 mm (15")	453 kg (998.7 lbs)	138.5 kg (305.3 lbs)
MP150-MC	MC150	No	8 5/8" API	340 mm (13.4")	1,662 mm (65.4")	381 mm (15")	457 mm (18")	857 kg (1,889.4 lbs)	206 kg (454.2 lbs)

# 18-24-INCH HAMMERS SPECIFICATIONS




**Disclaimer:**

1. Air consumption values are based on a combination of simulation data and real-world testing.
2. All air charts are based on normal temperature and atmospheric pressure: 20°C and 101.325 kPa (68°F and 14.696 psi).
3. Air density decreases with altitude, which will increase air consumption. Please consult the Mincon technical implementation team for exact air package requirements that take account for altitude and ground conditions.

Hammer name	Shank support	Foot valve	Standard backhead thread / type	Hammer OD	Hammer length (shoulder to shoulder)	Minimum bit size	Maximum bit size	Hammer weight	Piston weight
MP180-QL	QL200	Yes	8 5/8" API	400 mm (15.8")	1,659mm (65.3")	457 mm (18")	610 mm (24")	1,177 kg (2,595 lbs)	284 kg (626.1 lbs)
MP180-N180	N180	Yes	8 5/8" API	400 mm (15.8")	1,695 mm (66.7")	457 mm (18")	610 mm (24")	1,164 kg (2,566 lbs)	282 kg (621.7 lbs)
MP180-MQ	MQ180	No	8 5/8" API	400 mm (15.8")	1,781 mm (70.1")	457 mm (18")	610 mm (24")	1,241 kg (2,736 lbs)	320 kg (705.5 lbs)
MP240-N240	N240	Yes	HEX 275	525 mm (20.7")	2,016 mm (79.4")	610 mm (24")	864 mm (34.1")	2,480 kg (5,467 lbs)	548 kg (1,208 lbs)
MP240-MQ	MQ240	No	HEX 275	525 mm (20.7")	1,987 mm (78.2")	610 mm (24")	864 mm (34.1")	2,565 kg (5,655 lbs)	544 kg (1,199.4 lbs)

# 34-40-INCH HAMMER SPECIFICATIONS

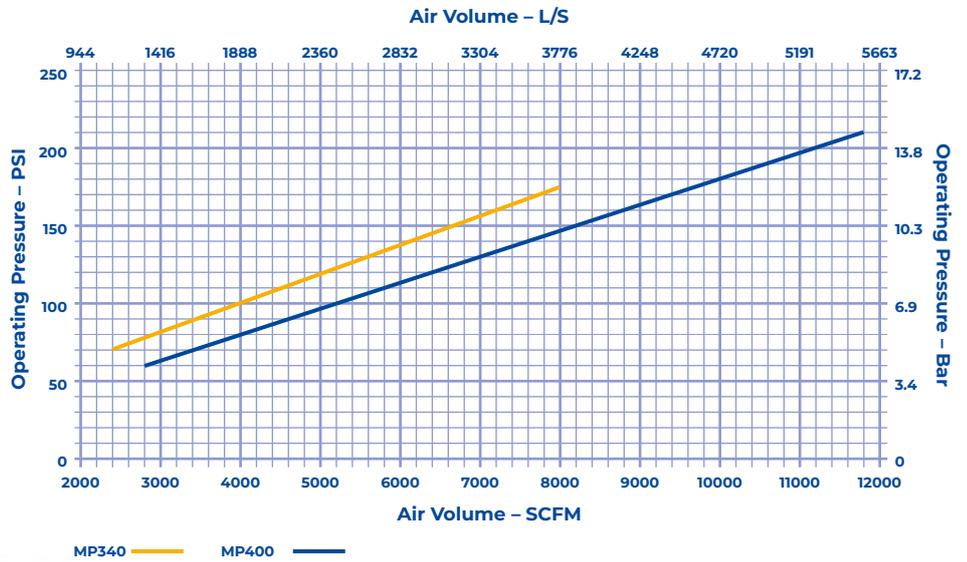

**Disclaimer:**

1. Air consumption values are based on a combination of simulation data and real-world testing.
2. All air charts are based on normal temperature and atmospheric pressure: 20°C and 101.325 kPa (68°F and 14.696 psi).
3. Air density decreases with altitude, which will increase air consumption. Please consult the Mincon technical implementation team for exact air package requirements that take account for altitude and ground conditions.

Hammer name	Shank support	Foot valve	Standard backhead thread / type	Hammer OD	Hammer length (shoulder to shoulder)	Minimum bit size	Maximum bit size	Hammer weight	Piston weight
MP340	MF34	No	HEX 370	750 mm (29.6")	2,336 mm (92")	850 mm (33.5")	1,220 mm (48.1")	5,807 kg (12,802 lbs)	1,050 kg (2,315 lbs)
MP400	MF34	No	HEX 370	750 mm (29.6")	2,336 mm (92")	1,000 mm (39.4")	1,524 mm (60")	6,048 kg (13,334 lbs)	1,500 kg (3,307 lbs)

# DTH DRILL BITS

**Mincon offers one of the most comprehensive ranges of DTH drill bits in the industry, suited to all ground types and drilling conditions and for a wide variety of rock-drilling applications.**

Mincon DTH drill bits have had their designs evolved and performance fine-tuned using customer feedback and decades of rock drilling experience in all types of ground conditions.

Our DTH drill bits are designed to withstand the most demanding drilling conditions. Mincon drill bits can be specified with your required DTH shank design, with special order shanks

available on request. We offer flat, convex, and concave bit face designs; speak to a Mincon representative to discuss the ideal tooling for the ground conditions at your work site. All bits use high-quality, ultra-durable tungsten carbide grades designed to enhance bit life and improve penetration rates.

Precision engineering, world-class heat treatment processes, and high-quality materials – the key ingredients for drill-site consumables that keep you productive and reduce total drilling costs.

**“ Precision engineering, world-class heat treatment processes, and high-quality materials. ”**



# BIT FACE DESIGNS

Our DTH drill bits are available in three face designs – convex, concave, and flat – suited to the most common ground conditions for drilling.



## CONVEX

Suitable for most drilling applications. Convex designs are particularly effective in hard, abrasive rock, where they deliver a good combination of high penetration rates and long service life.



## FLAT

Traditionally used for general-purpose drilling, the flat-face design is considered effective in very broken ground; hard formations; and soft formations where there is a tendency to over-drill.



## CONCAVE

An excellent all-round bit design that is suitable for hard and soft formations. The cone-shaped face provides good stability during drilling, ensuring straightness and low vibration. Carbide placement enhances penetration rates in most ground conditions.

# DRILL BIT CARBIDE INSERTS

Our bits manufactured using high-quality raw materials: from bit bodies to carbide inserts. Multiple grades of tungsten carbide have been developed to offer distinct advantages in various ground and drilling conditions, and these inserts are offered in shapes and sizes that suit a wide variety of applications.



“ Carbide grades and shapes suited to various ground conditions.



## DOME

Tough shape for hard, abrasive rock and deep-hole drilling. Suitable for nearly all rock-drilling applications.



## SEMI-BALLISTIC

A combination design that provides a speed increase over the conventional domed button and higher longevity than the more-aggressive ballistic carbide design. Less suited for broken ground conditions.



## BALLISTIC

Ideal for less-abrasive sedimentary deposits where speed is vital. Not recommended for badly broken ground or extremely hard rock.

# DRILL BIT SHANKS

Get the right drill bit for your hammer and ground conditions.

Our 3" to 12" drill bits are available in all major shank types, and our 15" to 40" bits can be ordered in the most common large-diameter shanks. Bit to hammer ratio is important, so a range of head sizes is available for each shank type.

If your requirement falls outside the listed specifications please contact your nearest Mincon location for further advice.




## FOOTVALVE SUPPORT

We offer DTH drill bits with and without footvalve support, depending on the application at hand and customer requirements. Standard shanks that support footvalves are offered with this insert and can also be ordered as an MQ version, which denotes the lack of a footvalve. We also offer the Mincon MC shank and other third-party shanks that operate without a footvalve.

## DRILL BIT SHANK SPECIFICATIONS

### DHD3.5

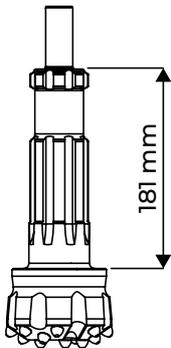

**Number of splines:** 8


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
85 mm (3.35 inch)

**Maximum bit size:**  
105 mm (4.13 inch)

### MD3.5

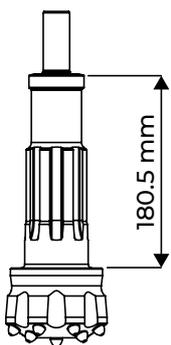

**Number of splines:** 8


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
95 mm (3.74 inch)

**Maximum bit size:**  
105 mm (4.13 inch)

### MC43

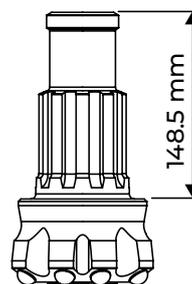

**Number of splines:** 10

**Drive pins required:**  
No


**Foot valve:** No

**Minimum bit size:**  
110 mm (4.33 inch)

**Maximum bit size:**  
127 mm (5 inch)

# DRILL BIT SHANK SPECIFICATIONS

## TD40

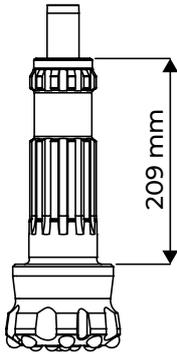

**Number of splines:** 12


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
110 mm (4.33 inch)

**Maximum bit size:**  
130 mm (5.12 inch)

## MQ40

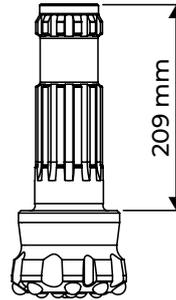

**Number of splines:** 12


**Drive pins required:**  
No

**Foot valve:** No

**Minimum bit size:**  
110 mm (4.33 inch)

**Maximum bit size:**  
130 mm (5.12 inch)

## DHD340

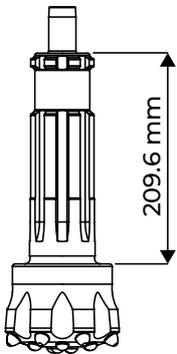

**Number of splines:** 8


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
105 mm (4.13 inch)

**Maximum bit size:**  
130 mm (5.12 inch)

## MD4

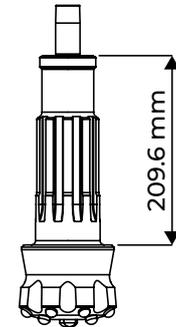

**Number of splines:** 10


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
110 mm (4.33 inch)

**Maximum bit size:**  
130 mm (5.12 inch)

## MP40

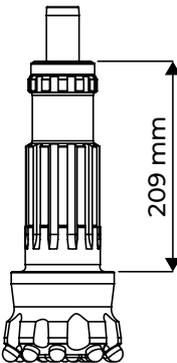

**Number of splines:** 12


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
110 mm (4.33 inch)

**Maximum bit size:**  
130 mm (5.12 inch)

## QL50

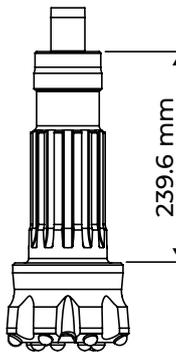

**Number of splines:** 12


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
130 mm (5.12 inch)

**Maximum bit size:**  
152 mm (5.98 inch)

## MQ50

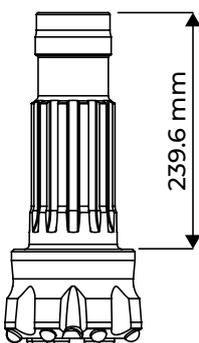

**Number of splines:** 12


**Drive pins required:**  
No

**Foot valve:** No

**Minimum bit size:**  
130 mm (5.12 inch)

**Maximum bit size:**  
152 mm (5.98 inch)

## DHD350

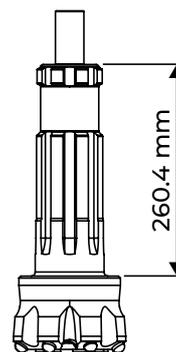

**Number of splines:** 8

**Drive pins required:**  
No


**Foot valve:** Yes

**Minimum bit size:**  
130 mm (5.12 inch)

**Maximum bit size:**  
152 mm (5.98 inch)

# DRILL BIT SHANK SPECIFICATIONS

## MC51

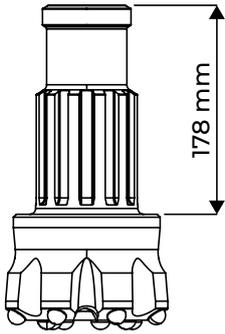

**Number of splines:** 12


**Drive pins required:**  
No

**Foot valve:** No

**Minimum bit size:**  
130 mm (5.12 inch)

**Maximum bit size:**  
152 mm (5.98 inch)

## QL60

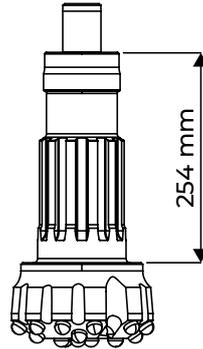

**Number of splines:** 12


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
152 mm (5.98 inch)

**Maximum bit size:**  
203 mm (8 inch)

## MQ60

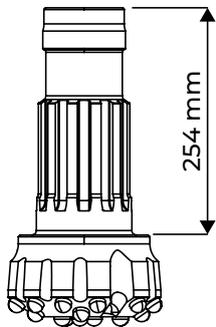

**Number of splines:** 12


**Drive pins required:**  
No

**Foot valve:** No

**Minimum bit size:**  
152 mm (5.98 inch)

**Maximum bit size:**  
203 mm (8 inch)

## MC61

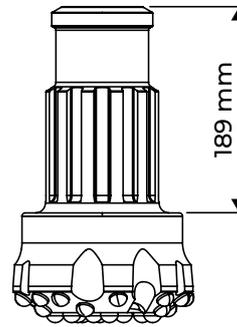

**Number of splines:** 12


**Drive pins required:**  
No

**Foot valve:** No

**Minimum bit size:**  
152 mm (5.98 inch)

**Maximum bit size:**  
203 mm (8 inch)

## DHD360

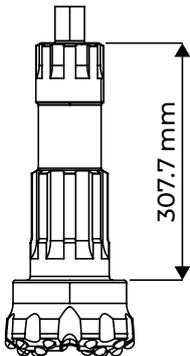

**Number of splines:** 8


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
152 mm (5.98 inch)

**Maximum bit size:**  
203 mm (8 inch)

## MC71

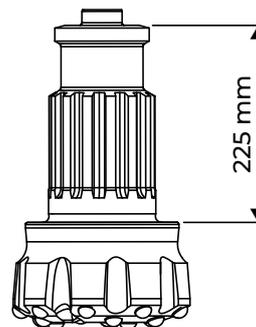

**Number of splines:** 14


**Drive pins required:**  
No

**Foot valve:** No

**Minimum bit size:**  
193 mm (7.6 inch)

**Maximum bit size:**  
228 mm (9 inch)

## QL80

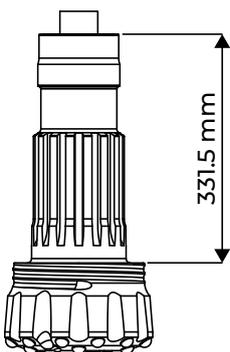

**Number of splines:** 16


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
200 mm (7.9 inch)

**Maximum bit size:**  
254 mm (10 inch)

## MQ80

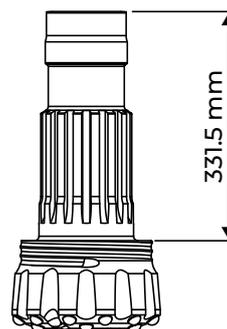

**Number of splines:** 16

**Drive pins required:**  
No


**Foot valve:** No

**Minimum bit size:**  
200 mm (7.9 inch)

**Maximum bit size:**  
254 mm (10 inch)

# DRILL BIT SHANK SPECIFICATIONS

## MC81

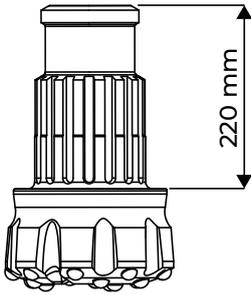

**Number of splines:** 16


**Drive pins required:**  
No

**Foot valve:** No

**Minimum bit size:**  
200 mm (7.9 inch)

**Maximum bit size:**  
254 mm (10 inch)

## DHD380

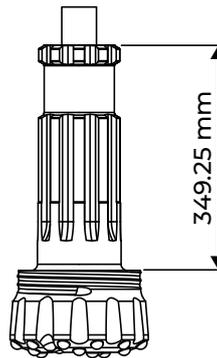

**Number of splines:** 10


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
200 mm (7.9 inch)

**Maximum bit size:**  
254 mm (10 inch)

## TD90

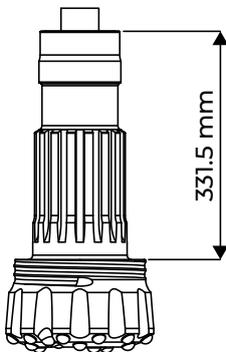

**Number of splines:** 16


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
200 mm (7.9 inch)

**Maximum bit size:**  
254 mm (10 inch)

## SD10

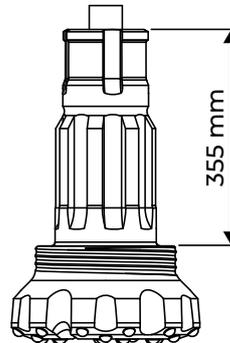

**Number of splines:** 8


**Drive pins required:**  
No

**Foot valve:** Yes

**Minimum bit size:**  
254 mm (10 inch)

**Maximum bit size:**  
330 mm (13 inch)

## MC100

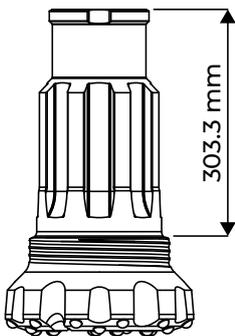

**Number of splines:** 8


**Drive pins required:**  
No

**Foot valve:** No

**Minimum bit size:**  
254 mm (10 inch)

**Maximum bit size:**  
330 mm (12 inch)

## QL120

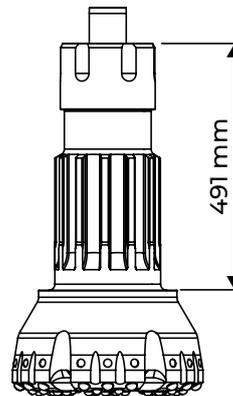

**Number of splines:** 12


**Drive pins required:**  
Yes

**Foot valve:** Yes

**Minimum bit size:**  
305 mm (12 inch)

**Maximum bit size:**  
381 mm (15 inch)

## MC120

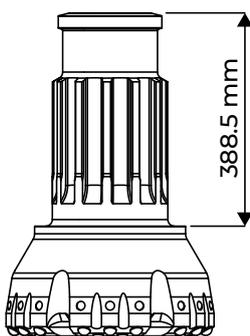

**Number of splines:** 12


**Drive pins required:**  
Yes

**Foot valve:** No

**Minimum bit size:**  
305 mm (12 inch)

**Maximum bit size:**  
381 mm (15 inch)

## N125

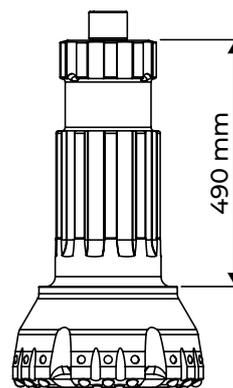

**Number of splines:** 10

**Drive pins required:**  
Yes


**Foot valve:** Yes

**Minimum bit size:**  
305 mm (12 inch)

**Maximum bit size:**  
381 mm (15 inch)

# DRILL BIT SHANK SPECIFICATIONS

## SD12

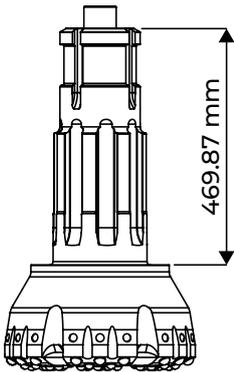

**Number of splines:** 12


**Drive pins required:**  
Yes

**Foot valve:** No

**Minimum bit size:**  
381 mm (15 inch)

**Maximum bit size:**  
457 mm (18 inch)

## MC150

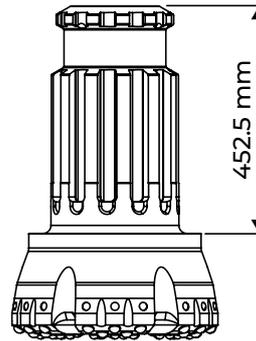

**Number of splines:** 12


**Drive pins required:**  
Yes

**Foot valve:** No

**Minimum bit size:**  
381 mm (15 inch)

**Maximum bit size:**  
457 mm (18 inch)

## QL200

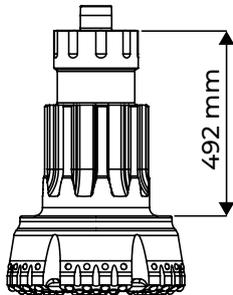

**Number of splines:** 9


**Drive pins required:**  
Yes

**Foot valve:** Yes

**Minimum bit size:**  
457 mm (18 inch)

**Maximum bit size:**  
610 mm (24 inch)

## N180

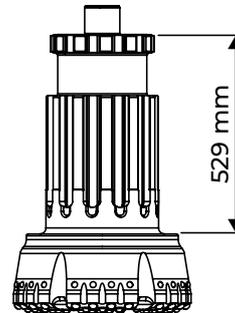

**Number of splines:** 12


**Drive pins required:**  
Yes

**Foot valve:** Yes

**Minimum bit size:**  
457 mm (18 inch)

**Maximum bit size:**  
610 mm (24 inch)

## MQ180

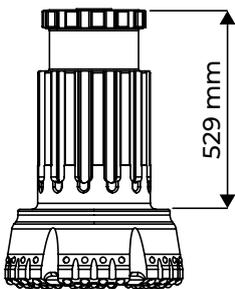

**Number of splines:** 12


**Drive pins required:**  
Yes

**Foot valve:** No

**Minimum bit size:**  
457 mm (18 inch)

**Maximum bit size:**  
610 mm (24 inch)

## N240

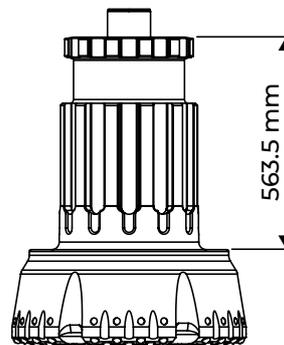

**Number of splines:** 12


**Drive pins required:**  
Yes

**Foot valve:** Yes

**Minimum bit size:**  
610 mm (24 inch)

**Maximum bit size:**  
864 mm (34 inch)

## MQ240

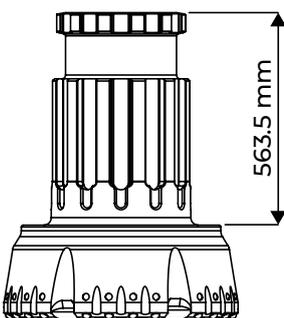

**Number of splines:** 12


**Drive pins required:**  
Yes

**Foot valve:** No

**Minimum bit size:**  
610 mm (24 inch)

**Maximum bit size:**  
864 mm (34 inch)

## MF34

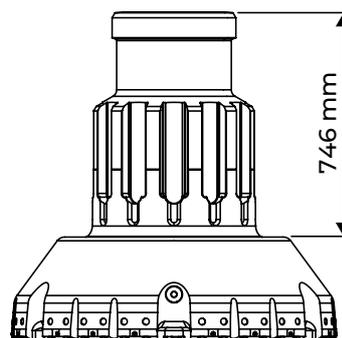

**Number of splines:** 12

**Drive pins required:**  
Yes

**Foot valve:** No

**Minimum bit size:**  
850 mm (33.4 inch)

**Maximum bit size:**  
1,450 mm (57.1 inch)

# THE COMPLETE PACKAGE

Mincon aims to offer comprehensive product range, allowing drillers to tailor a complete Mincon drilling solution for their application and drilling platform.

Our range includes DTH hammers, DTH drill bits, rotary drill bits, geotechnical and foundation drilling systems, reverse circulation systems for exploration drilling, horizontal directional drilling systems, and drill pipes. Each of these offerings has been designed in-house by Mincon and is manufactured at our state-of-the-art factories around the world.

In addition to our class-leading tools and solutions, we offer customers ancillary equipment for the operation and maintenance of their drill string. This equipment can be installed at customer sites or accessed through Mincon service centres.

We also offer a range of drilling fluids, including Mincon Envirosafe rock drilling oil which ensures the correct lubrication to prolong the service life of DTH hammers. The range includes Envirosafe Foamer and Hole Control, designed to stabilise boreholes in specific ground conditions.

Additional information on the complete Mincon product range can be obtained from your Mincon service centre, distributor, or by visiting [www.mincon.com](http://www.mincon.com).





The Driller's Choice



Scan QR code or visit [mincon.com/contact-us](https://mincon.com/contact-us) to find your nearest Mincon location

v.2026-02-23